

# Communication Networks

Prof. Laurent Vanbever

## Communication Networks

Spring 2022



Laurent Vanbever  
[nsg.ee.ethz.ch](mailto:nsg.ee.ethz.ch)

ETH Zürich (D-ITET)  
May 16 2022

Materials inspired from Scott Shenker & Jennifer Rexford

Last week on  
Communication Networks

### TCP: Reliable, in-order delivery

TCP provides a **connection-oriented, reliable, bytestream** transport service

**What UDP provides, plus:**

- Retransmission of lost and corrupted packets
- Flow control (to not overflow receiver)
- Congestion control (to not overload network)
- “Connection” set-up & tear-down

### TCP Header

Source port		Destination port	
Sequence number			
Acknowledgment			
HdrLen	0	Flags	Advertised window
Checksum		Urgent pointer	
Options (variable)			
Data			

### Establishing a TCP Connection



Each host tells  
its ISN to the  
other host.

Three-way handshake to establish connection

- Host A sends a **SYN** (open; “synchronize sequence numbers”)
- Host B returns a SYN acknowledgment (**SYN ACK**)
- Host A sends an **ACK** to acknowledge the SYN ACK

**This week** on  
Communication Networks

Congestion  
Control


DNS

Introduction to  
2nd project



[ethz.ch](https://ethz.ch) ⇄  
129.132.19.216

reliable transport  
starts *today!*



ethz.ch ⇔  
129.132.19.216

Internet has one **global system** for

- **addressing** hosts IP  
by design
- **naming** hosts DNS  
by "accident", an afterthought

Internet has one **global system** for

- **naming** hosts DNS  
by "accident", an afterthought


### Using Internet services can be divided into four logical steps

step 1	A person has name of entity she wants to access	www.ethz.ch
step 2	She invokes an application to perform the task	Chrome
step 3	The application invokes DNS to resolve the name into an IP address	129.132.19.216
step 4	The application invokes transport protocol to establish an app-to-app connection	


### The DNS system is a distributed database which enables to resolve a name into an IP address



### In practice, names can be mapped to more than one IP

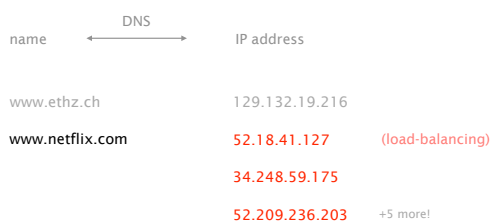

### In practice, IPs can be mapped by more than one name

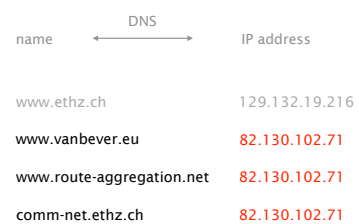

## How does one resolve a name into an IP?

initially **all** host to address mappings were in a file called `hosts.txt` in `/etc/hosts`

problem **scalability in terms of query load & speed**  
**management**  
**consistency**  
**availability**

When you need... **more flexibility**,  
you add... **a layer of indirection**

When you need... **more scalability**,  
you add... **a hierarchical structure**

## To scale, DNS adopt **three** intertwined hierarchies


naming structure **hierarchy of addresses**  
`https://www.ee.ethz.ch/de/departement/`

management **hierarchy of authority over names**


infrastructure **hierarchy of DNS servers**

naming structure **hierarchy of addresses**  
`https://www.ee.ethz.ch/de/departement/`


## Top Level Domain (TLDs) sit at the top



## Domains are subtrees


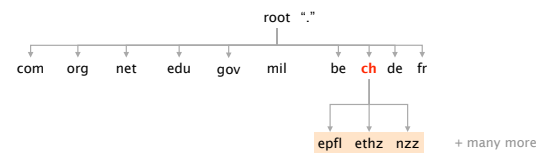


## A name, *e.g.* `ee.ethz.ch`, represents a leaf-to-root path in the hierarchy

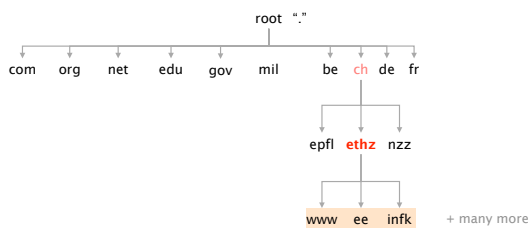


management **hierarchy of authority over names**


The DNS system is hierarchically administered

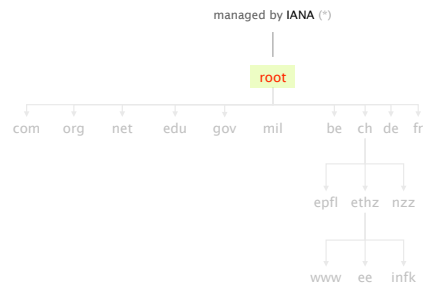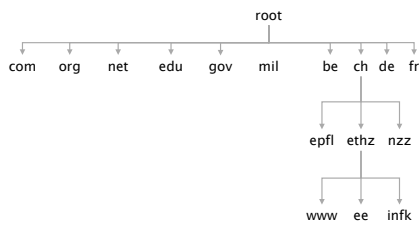

(\*) see <http://www.iana.org/domains/root/db>

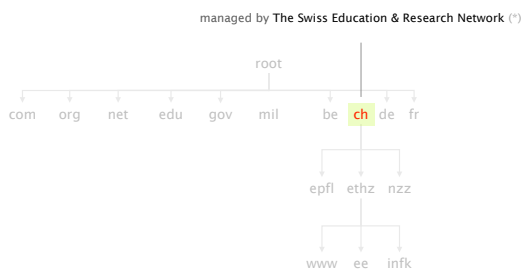


(\*) see <https://www.switch.ch/about/id/>

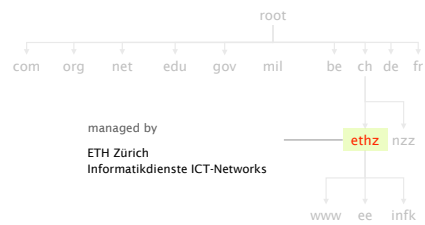


Hierarchical administration means that name collision is trivially avoided

infrastructure                      hierarchy of DNS servers

The DNS infrastructure is hierarchically organized

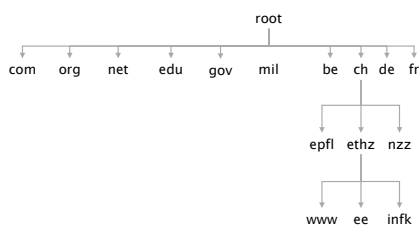


13 root servers (managed professionally) serve as root (\*)

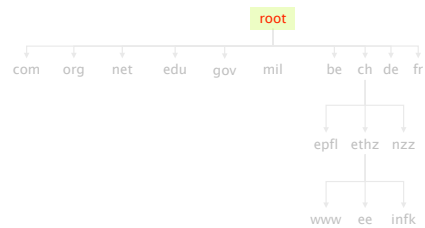

(\*) see <http://www.root-servers.org/>



- a. root-servers.net VeriSign, Inc.
- b. root-servers.net University of Southern California
- c. root-servers.net Cogent Communications
- d. root-servers.net University of Maryland
- e. root-servers.net NASA
- f. root-servers.net Internet Systems Consortium
- g. root-servers.net US Department of Defense
- h. root-servers.net US Army
- i. root-servers.net Netnod
- j. root-servers.net VeriSign, Inc.
- k. root-servers.net RIPE NCC
- l. root-servers.net ICANN
- m. root-servers.net WIDE Project

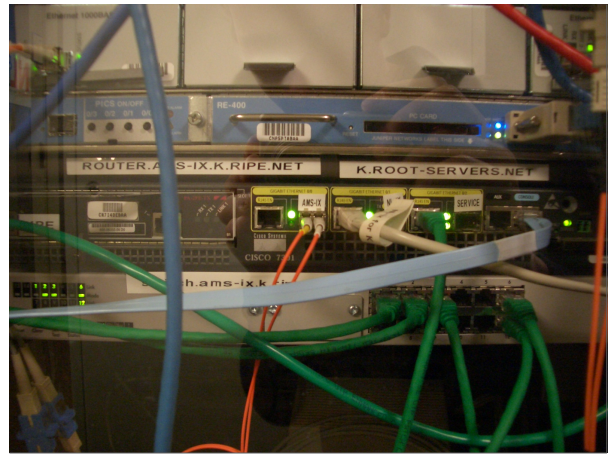


To scale root servers, operators rely on **BGP anycast**

Intuition


Routing finds shortest-paths

If several locations announce the same prefix, then routing will deliver the packets to the "closest" location

This enables seamless replications of resources

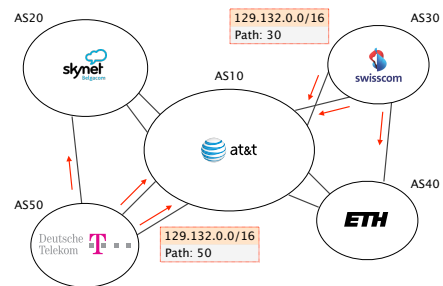


IP traffic  
193.0.14.129

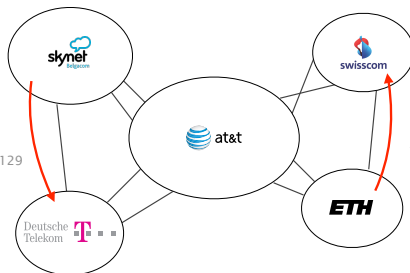

IP traffic  
193.0.14.129

Do you see any problems in performing load-balancing this way?

Instances of the k-root server (\*) are hosted in more than 80 locations worldwide

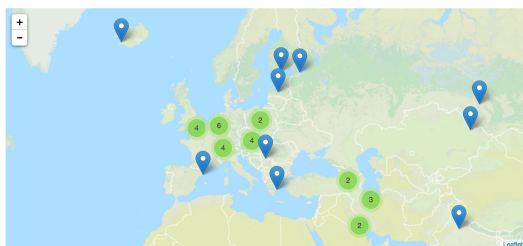

(\*) see [k.root-servers.org](http://k.root-servers.org)

Two of these locations are in Switzerland: in Zürich and in Geneva




All locations announce 193.0.14.0/23 in BGP, with 193.0.14.129 being the IP of the server


Two of these locations are in Switzerland: in Zürich and in Geneva

Do you mind guessing which one we use, here... in Zürich?


Each instance receives up to 80k queries per second summing up to a few billions queries per day

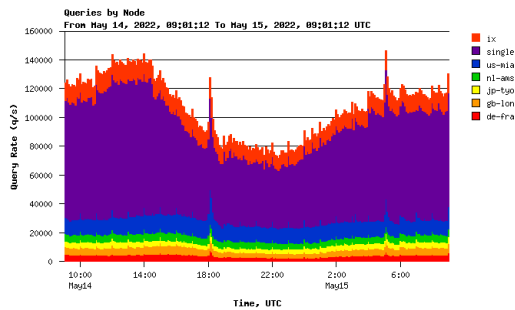

TLDs server are also managed professionally by private or non-profit organization

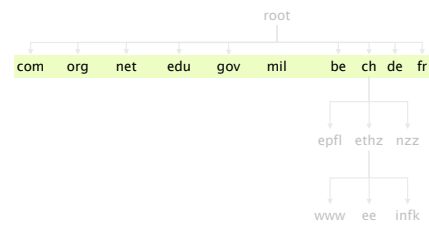

The bottom (and bulk) of the hierarchy is managed by Internet Service Provider or locally

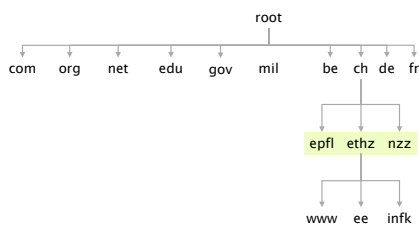

Every server knows the address of the root servers (\*) required for bootstrapping the systems

(\*) see <https://www.internic.net/domain/named.root>

Each root server knows the address of all TLD servers



lvanbever:-\$ dig @a.root-servers.net ch.

```

ch.      172800 IN  NS  a.nic.ch.
ch.      172800 IN  NS  b.nic.ch.
ch.      172800 IN  NS  c.nic.ch.
ch.      172800 IN  NS  d.nic.ch.
ch.      172800 IN  NS  e.nic.ch.
ch.      172800 IN  NS  f.nic.ch.
ch.      172800 IN  NS  h.nic.ch.
  
```

also see <https://www.iana.org/domains/root/db/ch.html>


If you want to learn more on ".ch" take a look at SWITCH's annual report

**REPORT 2021**  
of the .ch Registry


**SWITCH**

[https://www.nic.ch/export/shared/.content/Files/SWITCH\\_Report\\_Registry\\_2021.pdf](https://www.nic.ch/export/shared/.content/Files/SWITCH_Report_Registry_2021.pdf)

Any .ch DNS server knows the addresses of the DNS servers of all sub-domains

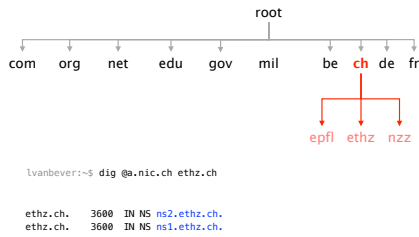

Once arrived at the leaf of the hierarchy (\*.ethz.ch), each DNS server knows the IP address of all children



To scale, DNS adopt **three** intertwined hierarchies

naming structure	addresses are hierarchical <a href="https://www.ee.ethz.ch/de/departement/">https://www.ee.ethz.ch/de/departement/</a>
management	hierarchy of authority over names
infrastructure	hierarchy of DNS servers

To ensure availability, each domain must have at least a primary and secondary DNS server

- Ensure name service availability as long as one of the servers is up
- DNS queries can be load-balanced across the replicas
- On timeout, client use alternate servers  
exponential backoff when trying the same server

Overall, the DNS system is highly scalable, available, and extensible

scalable	#names, #updates, #lookups, #users, but also in terms of administration
available	domains replicate independently of each other
extensible	any level (including the TLDs) can be modified independently


You've founded **next-startup.ch** and want to host it yourself, how do you insert it into the DNS?

- You register next-startup.ch at a registrar X  
*e.g.* Swisscom, OVH, GoDaddy and *many* more
- Provide X with the name and IP of your DNS servers  
*e.g.*, [ns1.next-startup.ch, 129.132.19.253]
- You set-up a DNS server @129.132.19.253  
define A records for www, MX records for next-startup.ch...

A DNS server stores Resource Records composed of a (name, value, type, TTL)

Records	Name	Value
A	hostname	IP address
NS	domain	DNS server name
MX	domain	Mail server name
CNAME	alias	canonical name
PTR	IP address	corresponding hostname

Using DNS relies on two components




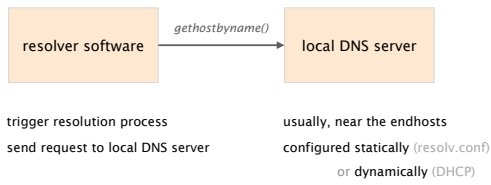


DNS query and reply uses UDP (port 53), reliability is implemented by repeating requests (\*)


(\*) see Book (Section 5)

DNS resolution can either be recursive or iterative


When performing a recursive query, the client offload the task of resolving to the server

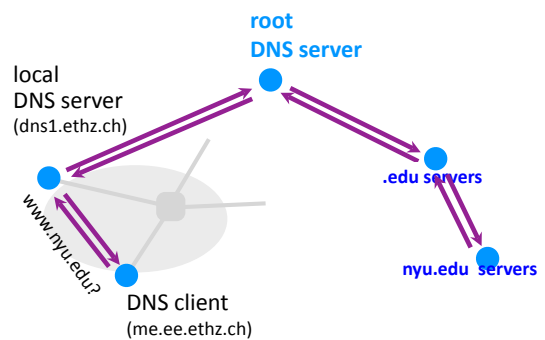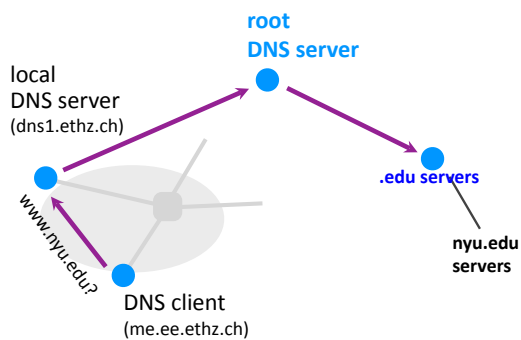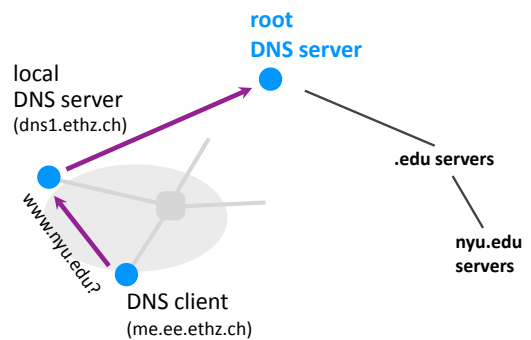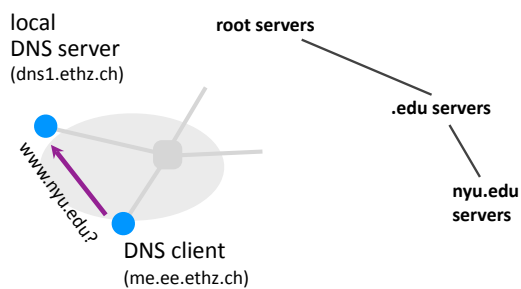

When performing a **iterative** query, the server only returns the address of the "next server"

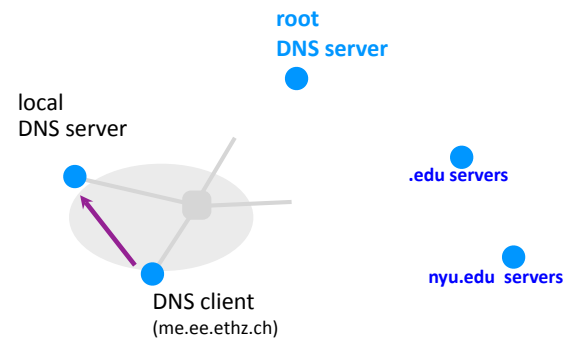

What about resolving speeds?  
Waiting for servers all over the globe is not fast...

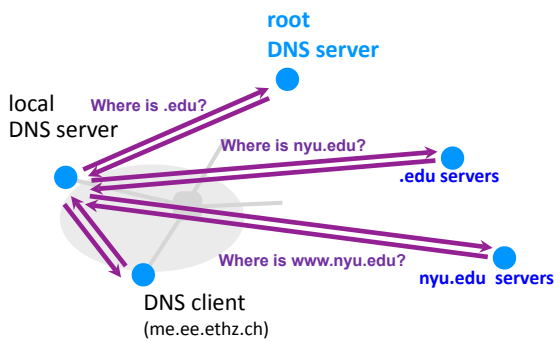

To reduce resolution times, DNS relies on caching

DNS servers cache responses to former queries and your client and the applications (!)

Authoritative servers associate a lifetime to each record Time-To-Live (TTL)

DNS records can only be cached for TTL seconds after which they must be cleared

As top-level servers rarely change & popular website visited often, caching is **very effective** (\*)

Top 10% of names account for 70% of lookups

9% of lookups are unique  
Limit cache hit rate to 91%

Practical cache hit rates **~75%**

(\*) see <https://pdos.csail.mit.edu/papers/dns/ton.pdf>

Congestion Control

DNS

Introduction to 2nd project

reliable transport starts today!

Communication Networks  
Spring 2022



Laurent Vanbever  
[nsg.ee.ethz.ch](mailto:nsg.ee.ethz.ch)

ETH Zürich (D-ITET)  
May 16 2022